

Open Refractory Heaters




≡ APPLICATION

Open Cartridge Heaters are widely used as immersion heaters or as air heater selecting appropriate sheath materials for heating various types of chemicals, oils & water OR air & gases.

≡ CONSTRUCTION

They are available in various diameters and lengths as per customers' specifications. However the standard diameters are from 8 mm OD to 75 mm OD. They can be designed for vertical as well as horizontal installation with required heating and non-heating zones. Max. Watt density: 30.W/Sq. inch. Max. surface temp. 400° C.

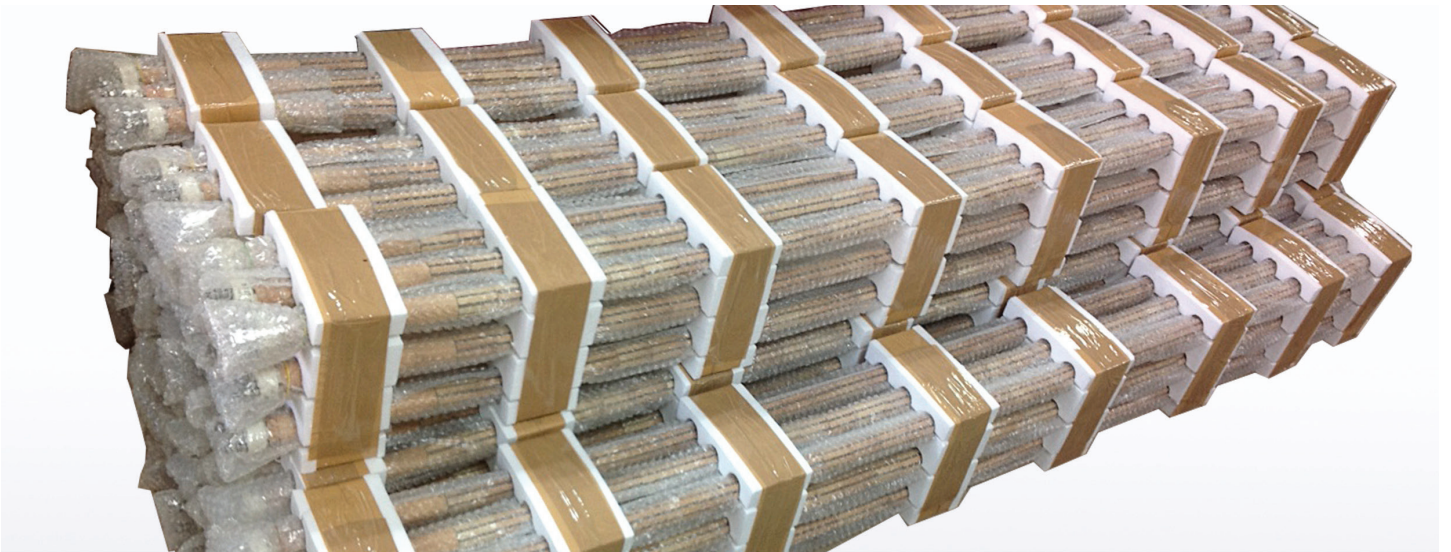

CORPORATE

115, Jaywant Ind. Estate, Opp. Sobo Central Mall,
63, Pt. M. M. Malaviya Road, Mumbai 400 034, India
Tel: +91 22 2353 1025; Fax: +91 22 2351 7431
Mob: +91 93 2224 4540

Email: info@heatsource.in

FACTORY

Bldg No. E-8, Parasnath Complex, Village Valgaon,
Dapoda Road, Tal.Bhiwandi, Thane 421 302, India
Tel: +91 2522 645665; Mob: +91 93222 32090
Mob: +91 98207 12343

Web: www.heatsource.in